


Datasheet

Description

Farran Technology offers the FBC series of down converters for use as frequency extenders for noise figure measurement test system. The FBC-FB-XX is a fullband system can be built upon an Agilent N8975A Noise Figure Analyzer (NFA) or X-Series Signal Analyzers with Option N9069A. The system allows the user to extend the frequency range of the NFA to allow for accurate noise figure measurements to be performed on a device covering Ka, U, V, E, W bands (26.5-110 GHz), when used with an Agilent E8247C signal generator (or equivalent). The FBC-12-FB covers the full E-band 60-90 GHz range.

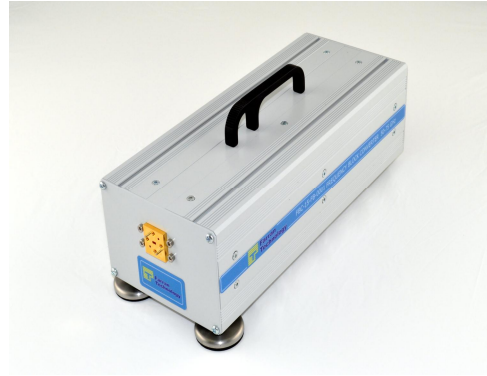

Features


- ~ Full band noise figure measurements
- ~ Compatible with Agilent NFA
- ~ Compatible with Agilent PXA with noise figure personality
- ~ Low noise figure for high system accuracy
- ~ Convenient packing to match the VNA frequency extension

Applications

- ~ Frequency extenders for noise figure measurement systems
- ~ Communications
- ~ OEM test instrumentation
- ~ EW and ECM systems
- ~ Radar front ends

Specification	Unit	Min	Typ	Max
System Operating Frequency	GHz	60		90
System Conversion Gain	dB	+10		
System Noise Figure	dB		14	17
IF Output Frequency	MHz		11.139	
LO Input Frequency	GHz	7.5		11.25
LO Input Power	dBm	+5		+10
Test Port Damage Level	dBm	+5		
Test Port Interface	-	WR-12 UG-387/U		
LO Connector	-	SMA 3.5 mm (F)		
IF Connector	-	SMA 3.5 mm (F)		
Power Requirements	-	240/110 V AC		
Weight	kg		3.5	
Dimensions (L x W x H)	-	290 x 120 x 90		

Datasheet

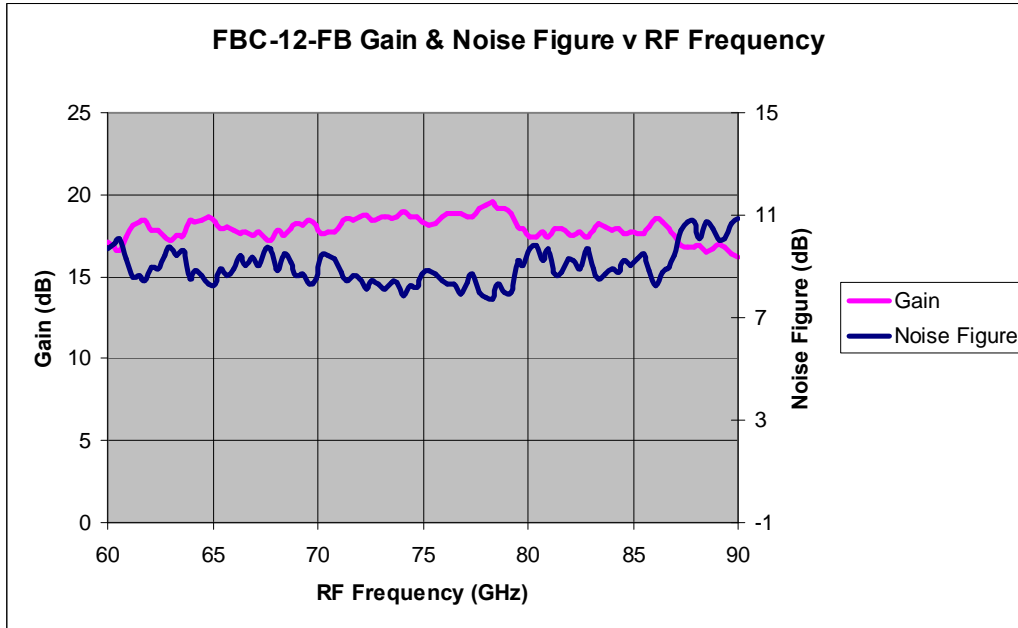

Notes:

Farran Technology reserves the right to change, without notice, the characteristic data and other specifications applied to this product. The product may be subject to Irish export restrictions.